

FlexMag3 Sensor Installation Quick Start Guide


Before you begin install, you will need



A Electric or Pneumatic drill with 68mm or 2-5/8” Drill Bit, a Vacuum cleaner and a depth measuring tool are recommended. You may also need a blow torch to dry up wet holes.



FlexMag3 sensors for installation



Burst Pack with adhesive 2 part liquid and a depth tool



Blow Torch

STEP-1

Using a pneumatic or electric drill, drill a 2-5/8” or 68mm diameter hole, 3.25”/82.5mm deep. Use blow torch to dry hole if wet.

FCC/IC Warning RF Exposure

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment This equipment should be installed and operated with minimum distance 20cm between the radiator& your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitte

Cet équipement est conforme aux limites d'exposition aux rayonnements ISED établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec une distance minimale de 20 cm entre le radiateur et votre corps.


safety

2006/95/EC

EMC


- » FCC: This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1). This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
- » CE0678
- » 2004/108/EC
- » IC: This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.
- » IC: Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement

FlexMag3 Sensor Quick Start Guide

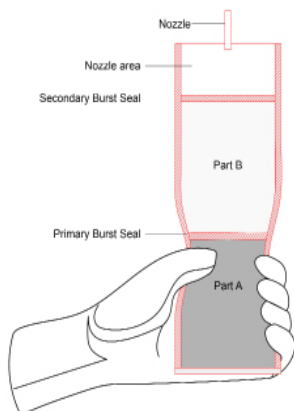


STEP-2

Squeeze end of pouch containing Part A towards primary burst seal, applying even pressure until primary burst seal slowly ruptures allowing Part A to mix with Part B

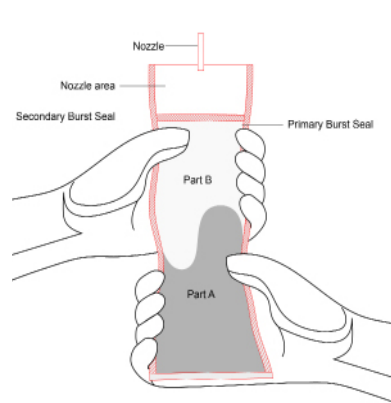

STEP-3

Knead pouch until Part A and Part B are thoroughly mixed for no more than 10 seconds

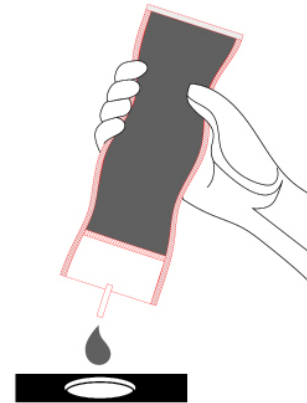

STEP-4

Remove cap, point pouch into the hole, squeeze pouch to burst secondary seal and pour the liquid in to the hole using depth tool to fill until adhesive just touches depth tool, 2.75" or 70mm from top of the hole,



STEP-5

Place sensor with label up and the arrow pointing in the direction of traffic within 15 seconds of previous step to about 1/8" or 3mm from surface. Place the remaining adhesive from burst pack into the hole fully encapsulating the sensor

Note: Before starting the sensor installation process, please make sure to read all steps completely. **Steps 2 to 5 should be completed within a total of 1 minute.**

Local Distributor